




## Standard Max Line





### LT heating line-up systems for wall freezing cabinets with aluminium framed doors

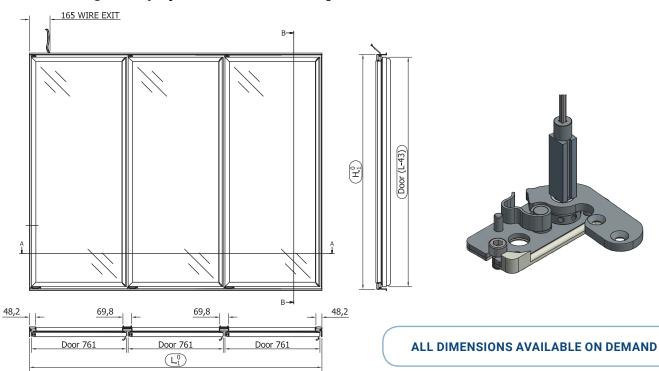









### **ALUMINIUM FRAMED GLASS DOOR**

Exclusive design and full height comfortable grip handle

Left to right hand and vice versa reversible door

Swing door made of triple glass with security exterior layers according to UNI 12150 standard

Glass standard heating: 220V 100W/SQM (any other voltage and wattage available on demand)

Aluminium frame standard heating: 220V 7.5W/LMT (any other voltage and wattage available on demand)

Adjustable self-closing action by torsion bar

Manual open wide door lock

### **STANDARD HEATING MASTER FRAME**

Silver satin aluminium insulated by Ral 9005 Pvc covers

Any frame is adapted to receive aluminium framed or full glass doors by TGD

Available configurations: 1, 2, 3, 4 and 5 openings


T8 and led on board prepared or led pre-wired configuration available





# Standard Max Line




## LT heating line-up systems for wall freezing cabinets with full glass doors

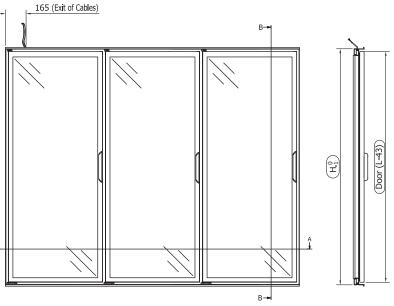








#### ALL DIMENSIONS AVAILABLE ON DEMAND









### **FULL GLASS DOOR**

Full Glass door with customizable exterior Ral 9005 silk screen (other colours available on demand)

High fashion Italian design with full height or short comfortable grip handle

Left to right hand reversible door

Swing door made of triple glazing glass with security exterior layers according to UNI 12150 standard

Glass standard heating: 220V 100W/SQM (any other voltage and wattage available on demand)

Aluminium frame standard heating: 220V 7.5W/LMT (any other voltage and wattage available on demand)

Adjustable self-closing action by torsion bar

#### STANDARD HEATING MASTER FRAME

Silver satin aluminium insulated by Ral 9005 Pvc covers

Any frame is adapted to receive aluminium framed or full glass doors by  $\mathsf{TGD}$ 

Available configurations: 1, 2, 3, 4 and 5 openings

T8 and led on board prepared or led pre-wired configuration available