


Normal temperature operating conditions

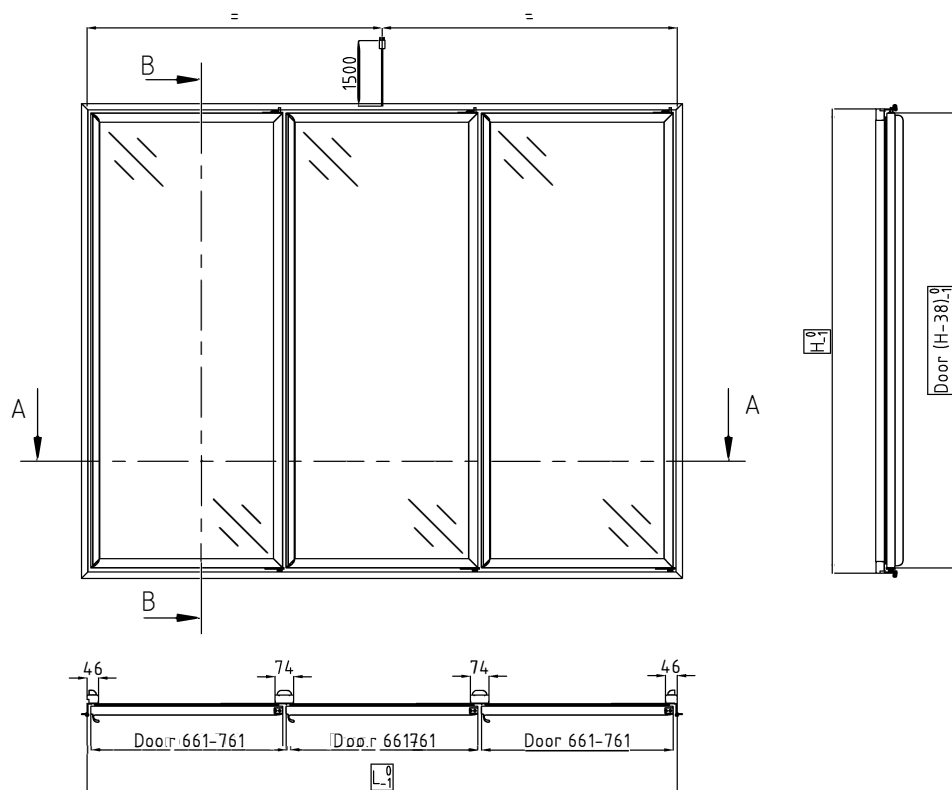

ALUMINIUM FRAMED GLASS DOOR

Exclusive design and full height comfortable grip handle

Left to right hand and vice versa reversible door

Swing door made of double security glass layers according to UNI 12150 standard

Adjustable self-closing action by torsion bar

Manual open wide door lock

STANDARD HEATING MASTER FRAME

Silver satin aluminum insulated by Ral 9005 Pvc covers

Any frame is adapted to receive aluminum framed glass doors by TGD

Any master frame voltage available on demand (standard 220V)

Standard frame prewired. Led application on demand



Standard configuration led prewiring. Led assembly on demand

MASTER FRAME "FILL-IN" DIMENSIONS AND SOURCING REQUIREMENTS

MODEL	1 OPENING		2 OPENINGS		3 OPENINGS		4 OPENINGS		5 OPENINGS	
	LxH	WATT	LxH	WATT	LxH	WATT	LxH	WATT	LxH	WATT
ROLL-IN X90	900x1939	55	1780x1939	118	2662x1939	171	3546x1939	224	4428x1939	277
Led power W (*)	22 Watt		44 Watt		66 Watt		88 Watt		110 Watt	

(*) only for "Led on board" configuration

Normal temperature operating conditions

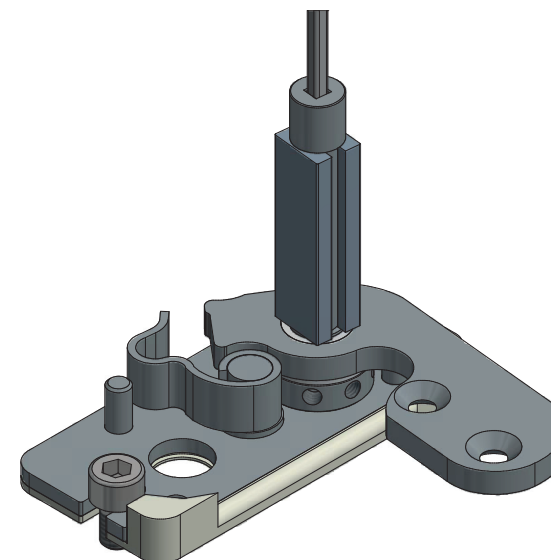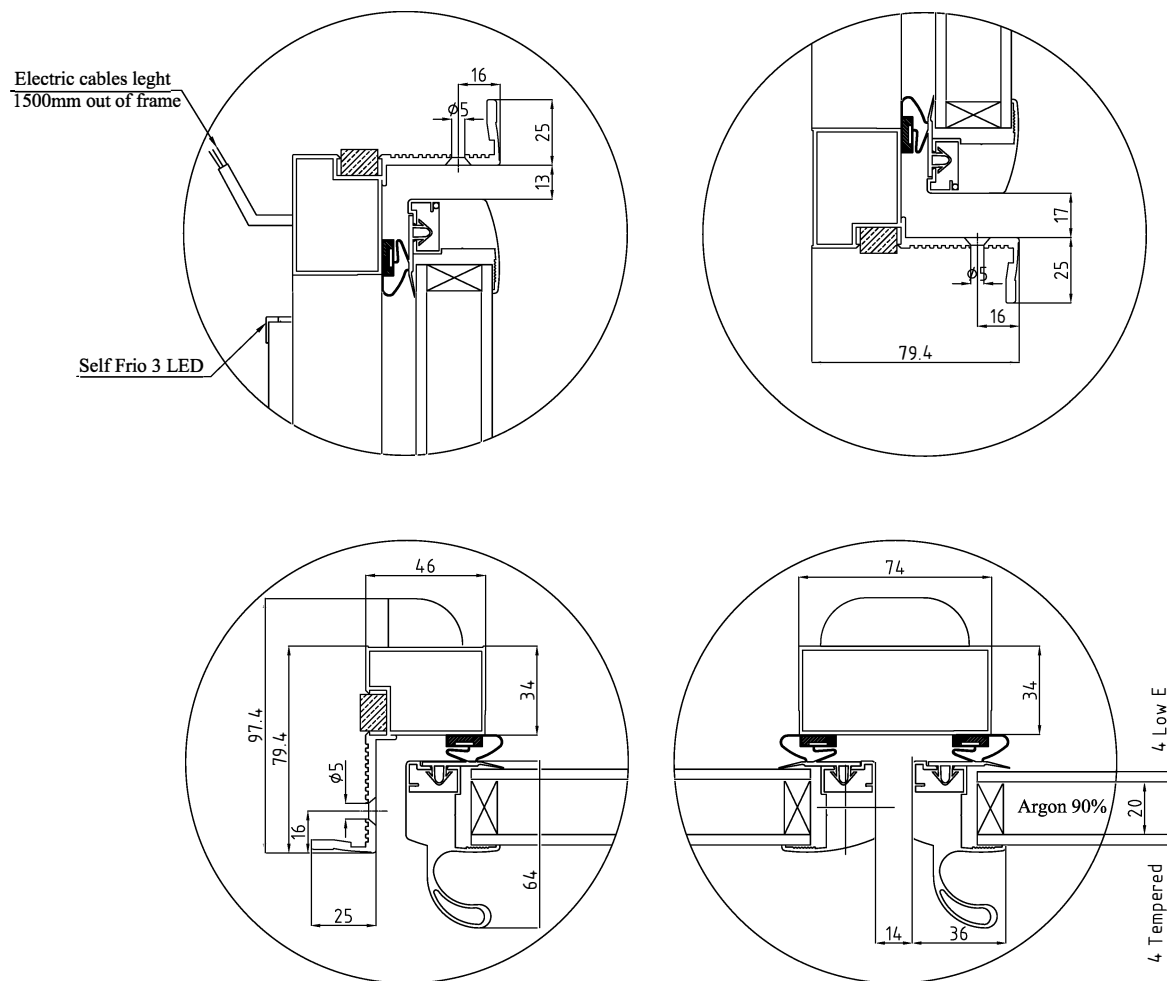

SELF CLOSING ACTION BY TORSION BAR